

## 280SL\*

**Description:** Back lit emergency exit sign. Surface wall mounted.

**Standards:** \*SANS 60598-2-1  
\*SANS 1186-3  
\*SANS 1464-22

**Specification:** Total Weight: 3.5 Kg  
Voltage / Current: 220-240VAC 50-60Hz  
Lamp 1 of 1: SMD LED board with mains operated LED Driver.  
Operating Temp: Min 0°C / Max 25°C.  
IP Rating: IP20.  
3 Hour Emergency Battery Backup  
Easy Wall Mount Installation  
Minimum Lumen Maintenance: 50 000h L80/B10




EXAMPLE PRODUCT CODE		280	SL	LM	MW
FAMILY	280SL	280			
PRODUCT	Surface Wall	SL			
CONTROL GEAR	Mains / Central Battery*	LA			
	Mains / Central Battery DALI*	DA			
	Maintained Self-Contained	LM			
	Non-Maintained Self-Contained	LN			
	Maintained AutoTest	YL			
	Maintained DALI	DL			
COLOUR	Brushed Aluminium. Polished & lacquered	BA			
	Brushed Brass. Polished & lacquered	BB			
	Brushed Copper. Polished & lacquered	BC			
	Matte Black	MK			
	Matte White	MW			
	Textured Black	TK			
	Textured White	TW			
	Special finish: customer specification.	Z			

Example Code 280SLMW 280SL | Maintained Self Contained | Matt White Finish

For more information on colours, please go to the **Finishes Page**. For more information on Legends, please go to the **Legends Page**.

\*For input voltages please refer to our installation leaflets.

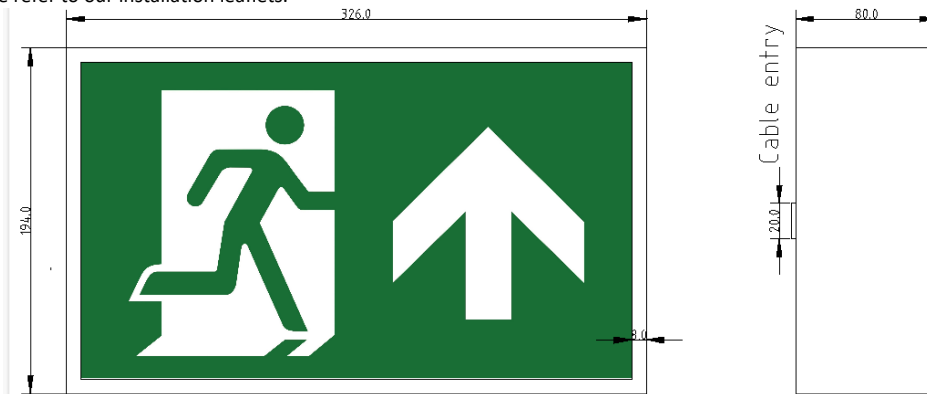

### ARC Lighting CC

12 Goud Crescent, Brackenfell Industrial, Cape Town, Western Cape, 7560 South Africa

Tel: 021 981 0539

Email: [info@arclighting.co.za](mailto:info@arclighting.co.za)

Website: [www.arclighting.co.za](http://www.arclighting.co.za)

ARC Lighting CC registered in South Africa No. 1994/011049/23