

# **GALVANISED STEEL POLE STRAIGHT**

## **MODEL NUMBER**

**GP76PA2.5H**

## **SPECIFICATIONS**

**Body:** Galvanised Steel


**Mounting:** Buried or Plinth Mounted

**Finish:** Raw or Powder coated

**Accessories:** Access door and bolt cage


### **Features:**

- Pole designs are in accordance with SABS 0225 specification.
- All products manufactured are Hot Dip Galvanised by a SABS approved Galvaniser in accordance with SANS 14713, SANS 121 and SANS 32 (NHD Mech).
- Certificates of galvanising compliance can be issued upon request.
- All poles are manufactured from Grade S 355 steel manufactured in accordance with SANS specification.
- All products are galvanised prior to Powder Coating.
- Materials: hot rolled round tubing 76.2 $\phi$ x3 S355MH, anchor & base plate.
- Colours: Galvanized (H), Black (K), White (W), Bespoke Colour (Z)

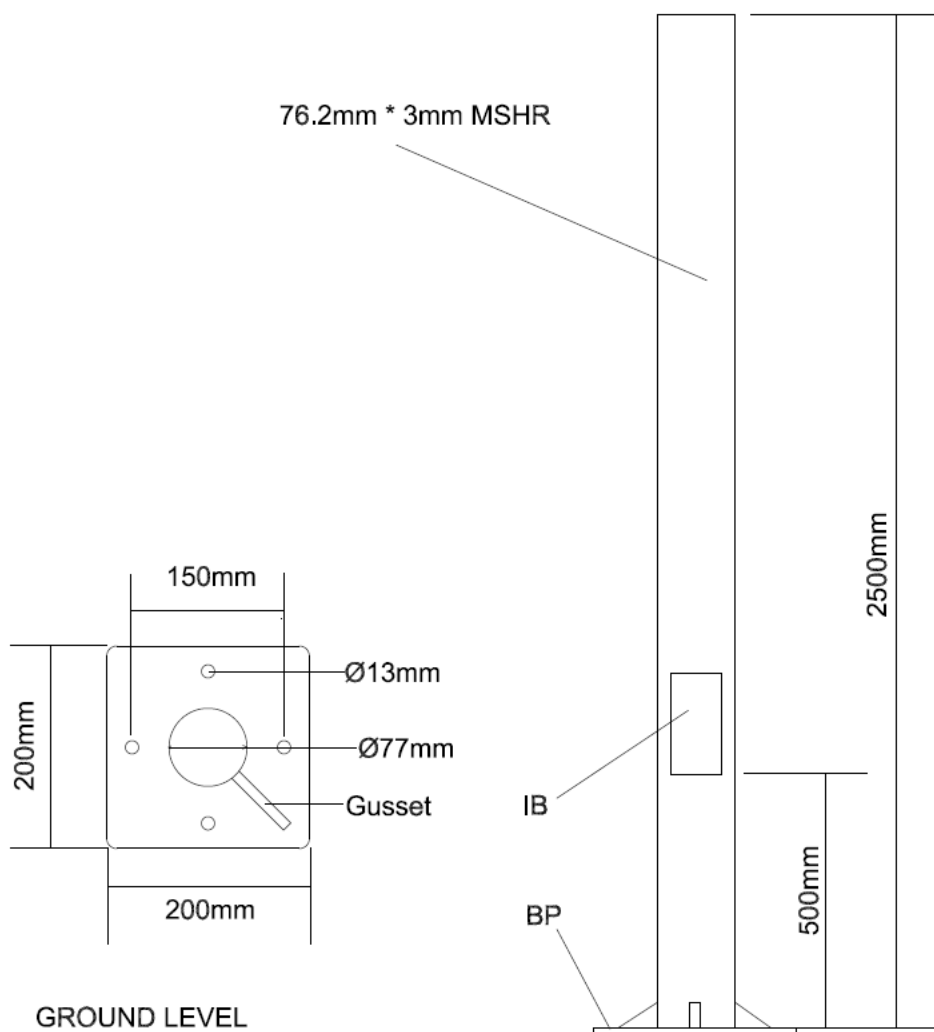

## Galvanised Steel Pole Straight Ø76mm

dimensions in mm

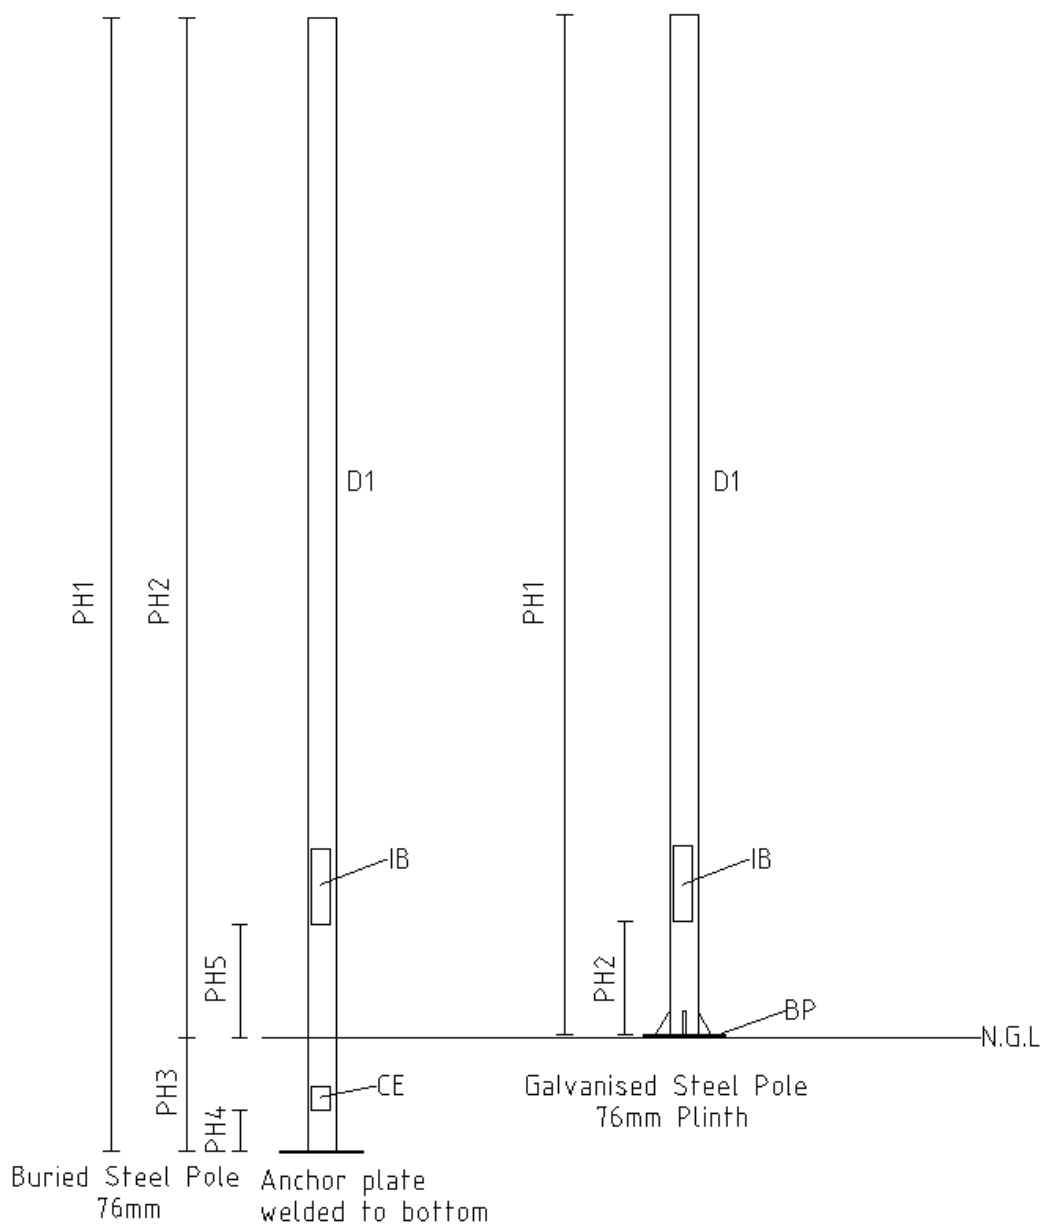

GP76BA - BURIED								
TYPE	PH1	PH2	PH3	PH4	PH5	D1	IB	CE
2.5m MH	3,000	2,500	500	250	500	76	150x50	50x90
3m MH	3,500	3,000	500	250	500	76	150x50	50x90
4m MH	4,500	4,000	500	250	500	76	150x50	50x90
5m MH	6,000	5,000	1,000	500	500	76	150x50	50x90

\* Example code for buried: GP76BA2.5H, GP76BA3H, GP76BA4H, GP76BA5H

GP76PA - PLINTH MOUNTED						
TYPE	PH1	PH2	D1	IB	BP	BC
1m MH	1,000	500	76	100x60	200x200	M12-500
2m MH	2,000	500	76	100x60	200x200	M12-500
2.5m MH	2,500	500	76	100x60	200x200	M12-500
3m MH	3,000	500	76	100x60	200x200	M12-500
4m MH	4,000	500	76	100x60	200x200	M12-500
5m MH	5,000	500	76	100x60	250x250	M16-650
6m MH	6,000	500	76	100x60	250x250	M16-650

\* Example code for plinth mounted: GP76PA1H, GP76PA2H, GP76PA2.5H, GP76PA3H, GP76PA4H, GP76PA5H, GP76PA6H